

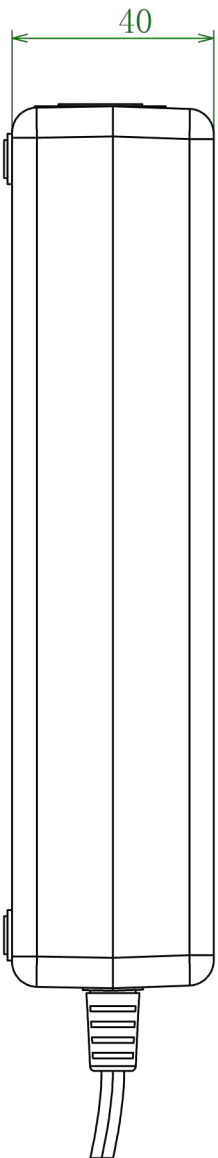
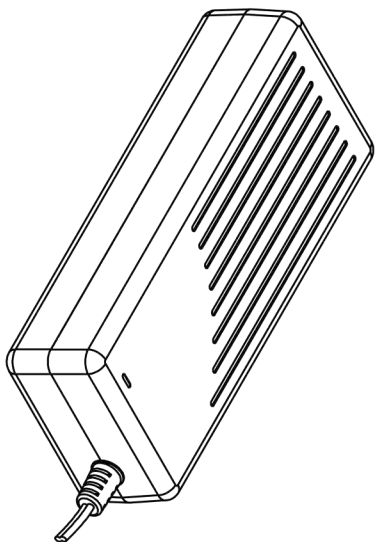


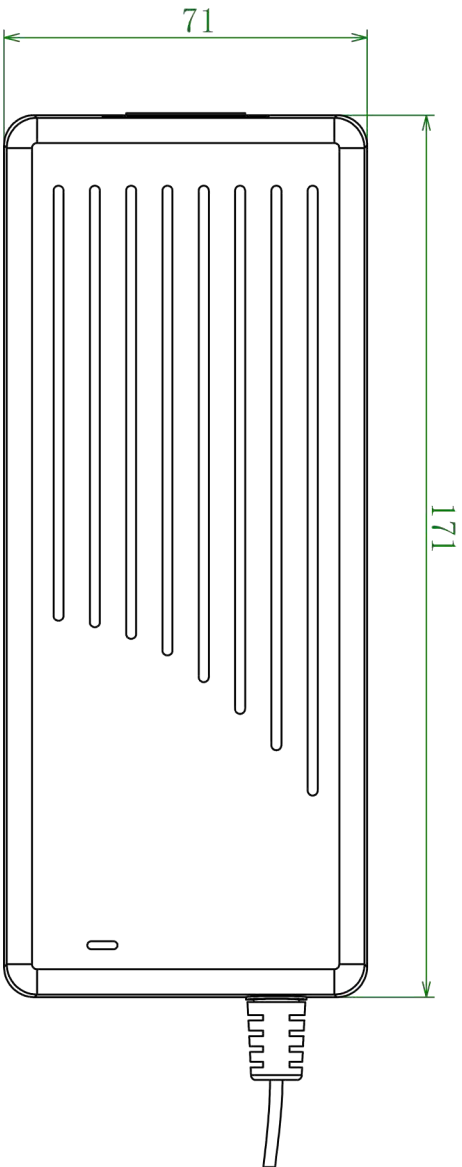

<b>A100-24 (27.6V 2.8A) Pb-Acid Battery Charger</b>		
<b>项目 Item</b>	<b>规格 Specification</b>	<b>备注 Remark</b>
<b>1.输入特性 Input</b>		
额定输入电压 Rating input voltage	100~240Vac 50/60Hz	
输入电压范围 Input voltage range	90~264Vac	
额定输入电流 Rating input current	1.5Arms	Input:100V Output:Full load
最大输入功率 Max input power	100W	Input:100V Output:Full load
<b>2.输出特性 Output</b>		
空载输出电压 No load output voltage	DC27.6V	
输出电压范围 Output voltage range	DC20.0~29.4V	
适用电池 Suit with battery type	24V Pb-Acid battery	
恒定电流 Charging current	2.8A ±10%	
恒定电压 Charging voltage	DC29.4V ±0.6V	
浮充电压 Floating charge voltage	DC27.6V ±0.4V	
充电结束电流 Charge-end current	≤0.4A±0.1A	
定时器 Timer	10小时	
最大输出功率 Max output power	82.32W	
纹波电压 Ripple voltage	≤276mV	满载 Full load
充电指示灯 Charging LED	红色Red:Charging	
	绿色Green:Full charge or idle	
输出短路保护 Shorted	有Yes	
输出反接保护 Reversed	有Yes	
效率 Efficiency	≥87%	满载 Full load @220V
<b>3.环境要求 Environment</b>		
工作温度 Operate temperature	-10 ~ +40℃	
工作湿度 Operate humidity	< +90%	相对湿度 Relative humidity
存储温度 Storage temperature	-40 ~ +70℃	
存储湿度 Storage humidity	0 ~ +95%	相对湿度 Relative humidity
冷却方式 Cooling	自然冷却 Natural	
抗振动 Vibration resistance	5MM/50HZ/600S	非运行状况 Non-operating condition
抗冲击 Impact resistance	1 meter drop test 3 times	非运行状况 Non-operating condition
<b>4.结构 Mechanical</b>		
重量 Weight	400g	
尺寸 Size	170X70X41MM	外壳尺寸Casing only
接线端子 Connector	按客户要求制定 Refer to order	
<b>5.安全特性 Safety</b>		
最大温升 Max. temperature rise	< 40℃ on casing	
安全认证 Safety approval	CE/cTUVus/CCC/PSE	
平均无故障时间 MTBF	30000H	
静电等级 ESD	8.0KV	
隔离耐电压 Hi-Pot Insulation	i/p to o/p: 3000V (1 min)	

CUSTOMER REV	REV	ZONE	DESCRIPTION	CHA BY/DATE	APP BY/DATE

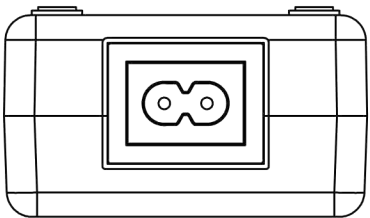

深圳市谷润数字电源有限公司

TITLE: 100W

MODEL: \_\_\_\_\_ MATL: \_\_\_\_\_

DES BY: \_\_\_\_\_ CAD FILE: \_\_\_\_\_ UNIT: mm WEIGHT: \_\_\_\_\_

CHECK BY: \_\_\_\_\_ COLOR: \_\_\_\_\_ Paper Size: A4 SCALE: **1:1**

PART NO.:	CUSTOMER P/N:	APP BY:	FINISH/TREATMENT:	DATE: